
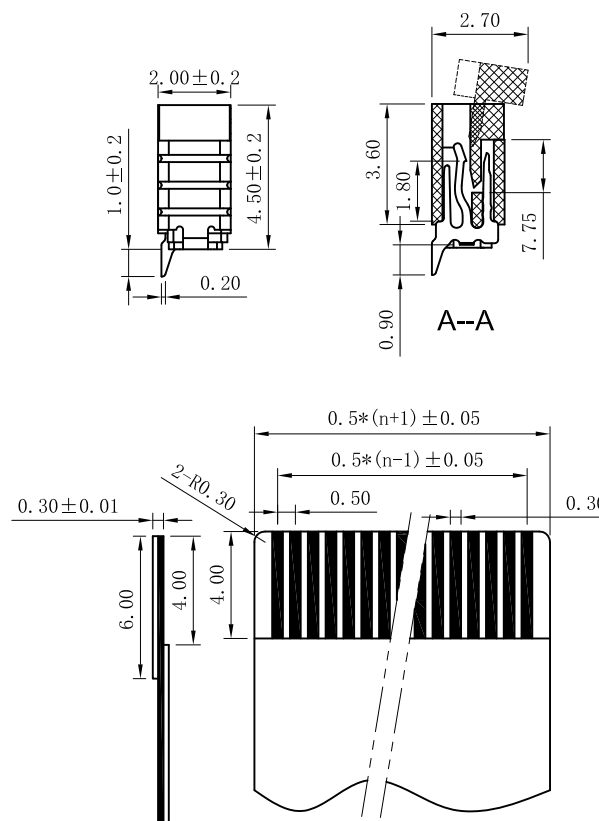


16 PINS 0.5 Pitch SMD Horizontal Type Bottom Contact

Ver	Date	Description
1.0	Apr-21-2025	Preliminary Release

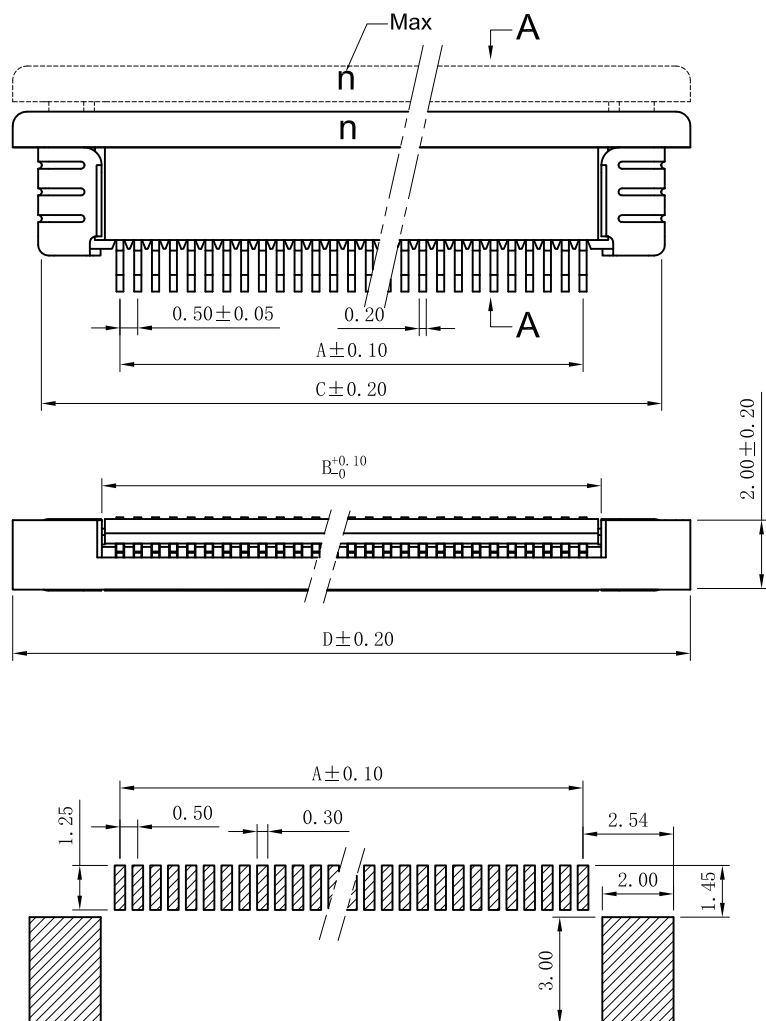

Pin Num	A	B	C	D
16	7.5	8.60	12.35	13.65

Material:

- 1、Housing: NYlon46 UL94V-0 Grey;
- 2、Loefer: PPS UL94V-0;
- 3、Contact: Phosphor bronze, tin/lead-plated;
- 4、Solder tab: Phosphor bronze, tin/lead-plated.

Specification:

- 1、Unverified Tolerance should comply with SJ1372-79;
- 2、Temperature Range: -25°C~85°C;
- 3、Rated Voltage: 50V, AC, DC;
- 4、Contact Resistance: $\leq 0.03 \Omega$;
- 5、Insulation Resistance: $\geq 500M \Omega$;
- 6、Withstand Voltage: 500V, AC/minute.


旭日东方科技有限公司
EastRising Technology Co., Ltd.
 www.lcd-china.com TEL: +86-755-33503873 FAX: +86-755-33507642-801



CD

UNIT: MM

SIZE: A4

SHEET: 1 OF 1

Part Number for Order: **ER-CON16HB -1**

DRAWN BY : Jim

CHECKED BY: Tony

APPROVED BY : Liu