


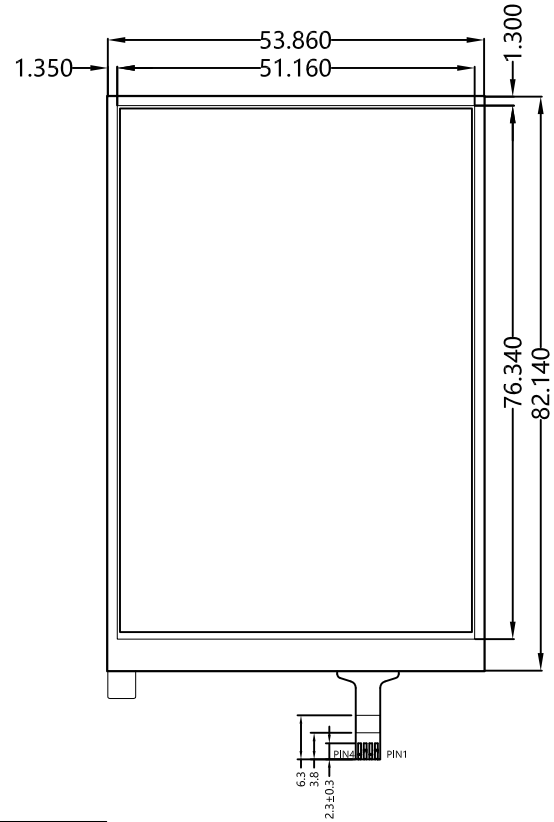


REV	DESCRIPTION	DESIGN	DATE
A	1'ST DEGIN	JIM	Jun-12-2024

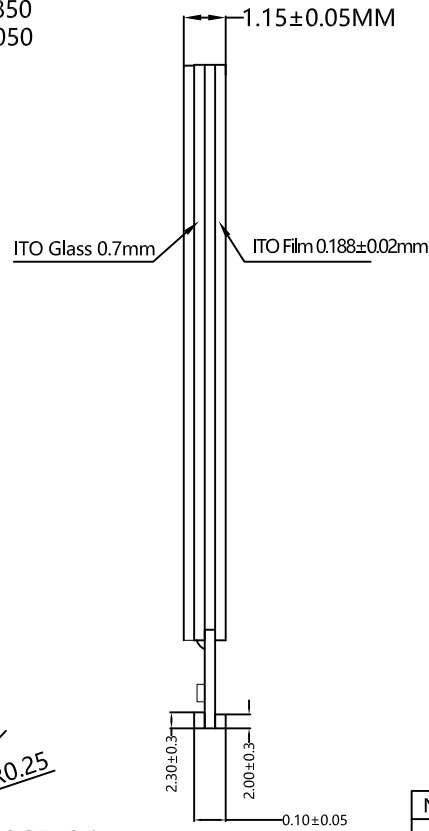

NO.	SYMBOL
1	YU
2	XL
3	YD
4	XR

- Notes:
- Type: Film to Glass
  - Operating Voltage:  $\leq 10V$
  - operation Temperature:  $-10^{\circ}C \sim 60^{\circ}C$   
Storage Temperature:  $-20^{\circ}C \sim 70^{\circ}C$
  - Life Time:  $\geq 1,000,000$  times
  - Connect Material: FPC
  - Response Time:  $\leq 10ms$
  - Linearity:  $\leq 1.5\%$
  - Transmittance:  $\geq 77\%$
  - Surface Hardness  $\geq 3H$  (Pencil)
  - operation force:  $80g \sim 120g$
  - Resistance:  
(Clear hard ITO Film):  $x: 150\Omega \sim 500\Omega$   
(Standard ITO Glass):  $350\Omega \sim 850\Omega$
  - Unspecified Tolerance:  $\pm 0.2$

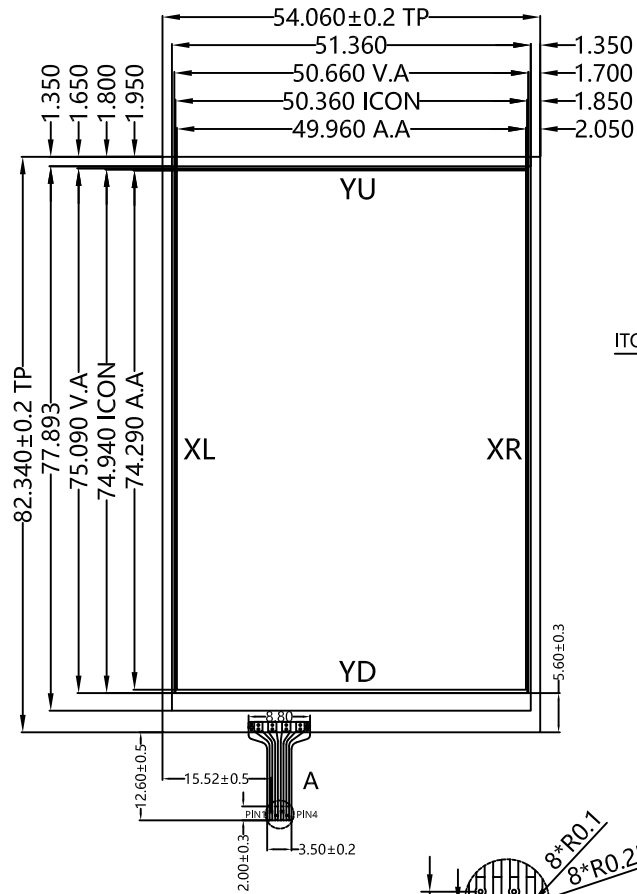

旭日东方科技有限公司  
EASTRISING TECHNOLOGY CO.,LTD

Web: www.buydisplay.com

Email: sales@buydisplay.com

APPROVALS		DATE	MODEL NUMBER :	PROJECTION	GENERAL TOL.	UNITS
APP			ER-TP035-8		SCALE:	MM
CHK					N.T.S.	
DWN	JIM	Jun-12-24	DO NOT SCALE THIS DRAWING.		SHEET:	1