
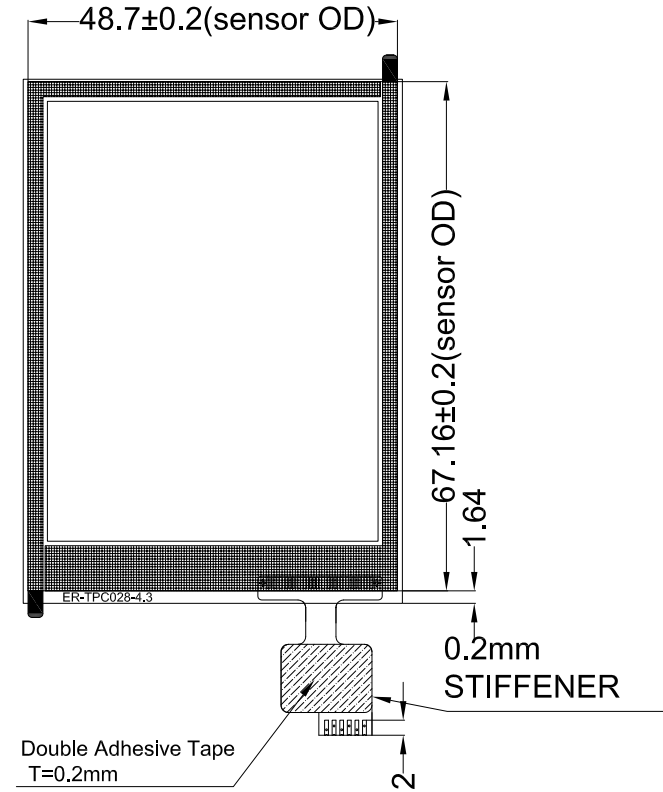
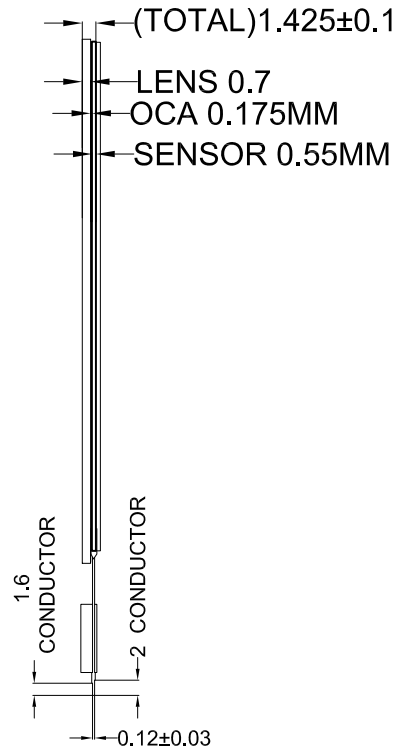


Customer Approved by:

REV	DESCRIPTION	DESIGN	DATE
A	1'ST DEGIN	JAVEN	Dec-29-2023
B			
C			
D			

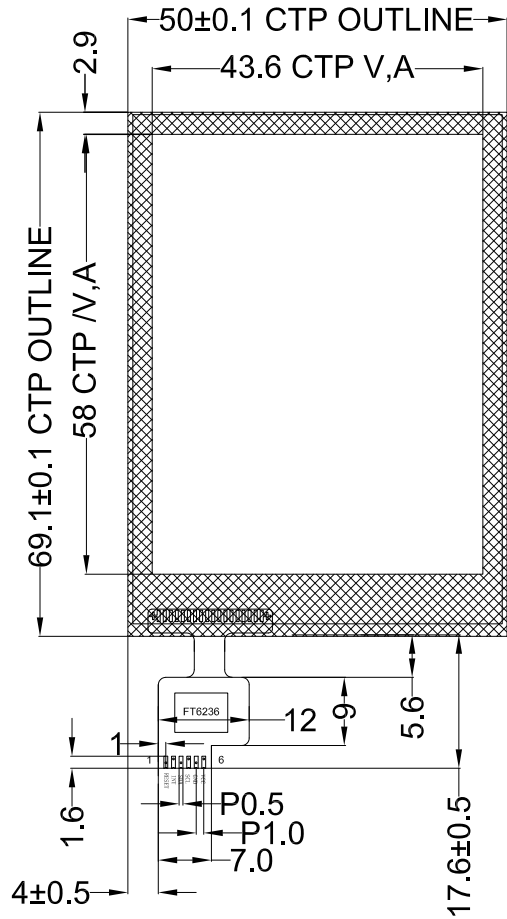

NOTE:

- 1.TYPE:G+G
- 2.OPERATING VOLTAGE: 2.8-3.3V
- 3.TRANSMITTANCE: >= 87%
- 4.SURFACE HARDNESS:>=6H
- 5.OPERATING TEMP: -20 ~ +70°C
- 6.STORAGE TEMP: -30 ~ +80°C
- 7.TOLERANCE:±0.20
8. TF6236U Controller

Pin Assignment

PIN NO.	SIGNAL	DESCRIPTION
1	/RESET	Chip Reset
2	/INT	Interrupt Signal
3	SDA	I2C Data Line
4	SCL	I2C Clock Line
5	GND	Ground Connection
6	VDD	Supply Voltage



旭日东方科技有限公司
EASTRISING TECHNOLOGY CO.,LTD

Web: www.buydisplay.com

Email: sales@buydisplay.com

APPROVALS	DATE	MODEL NUMBER :	GENERAL TOL.	UNITS
APP		ER-TPC028-4.3	SCALE: N.T.S.	MM
CHK				
DWN	JIM			
DO NOT SCALE THIS DRAWING.			PROJECTION	SHEET: 1