


NOTES:


- 1.The General Torlance is $\pm 0.20\text{mm}$.
- 2.All materials in the drawing Comply with the RoHS.

Ver	Date	History	Name	Data
Ver	A0	First Ver	Jim	Jun-07-2024


Top View

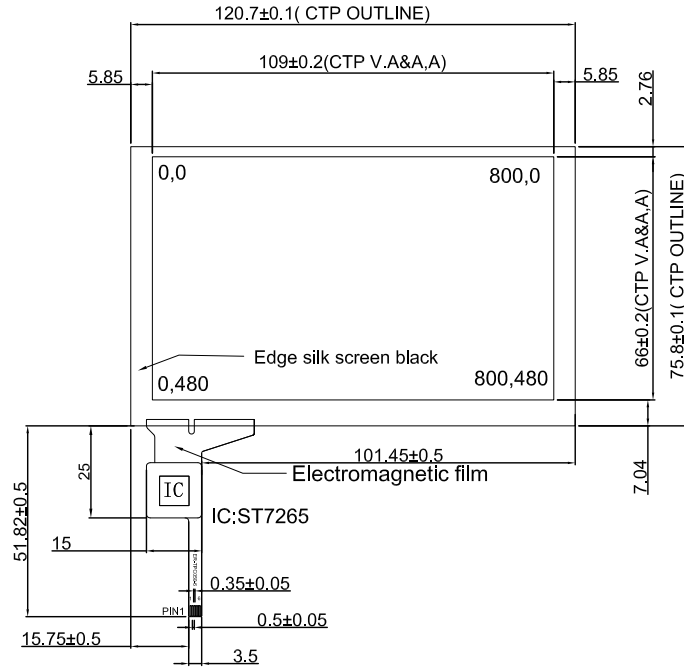

Side View

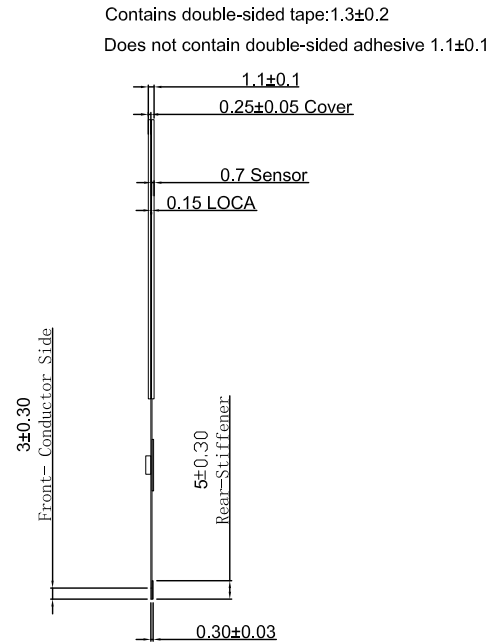

Bottom View

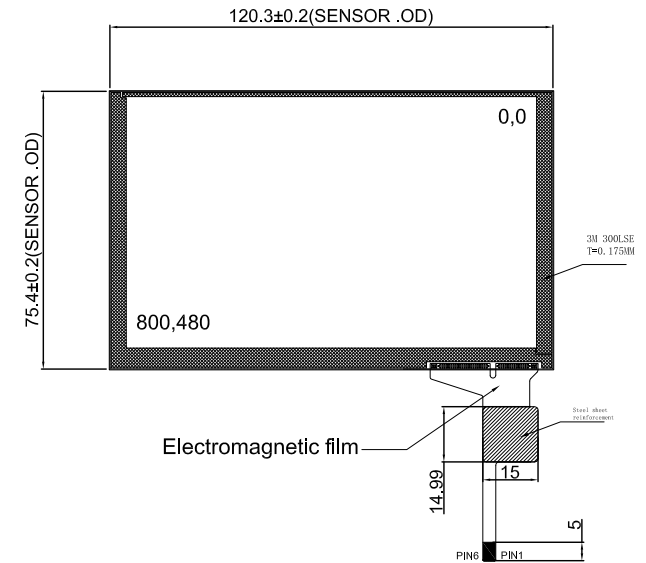

Item	Specification
1.Type	P+G
2.Operating Voltage	2.8-3.3V
3.Operation Temperature	-20°C~70°C
4.Storage Temperature	-30°C~80°C
5.Connect Material	FPC
6.Light Transparency	85% Min.
7.Surface Hardness	3H
8.Drive IC	ST7265
9.Points	5-point touch Gesture

PIN	Define
1	SCL
2	SDA
3	VDD
4	RESET
5	INT
6	GND



旭日东方科技有限公司
EASTRISING TECHNOLOGY CO.,LTD

Web: www.buydisplay.com

Email: sales@buydisplay.com

APPROVALS	DATE	MODEL NUMBER :	PROJECTION	GENERAL TOL.	UNITS
APP		ER-TPC050-6		SCALE: N.T.S.	MM
CHK		DO NOT SCALE THIS DRAWING.	SHEET: 1		
DWN	JIM	Jun-07-24			